


Blocks from Lignacite Ltd - type and finish to be specified

Render stop beads positioned back to back with sealant between, or use proprietary render beads e.g. *Renderplas*.

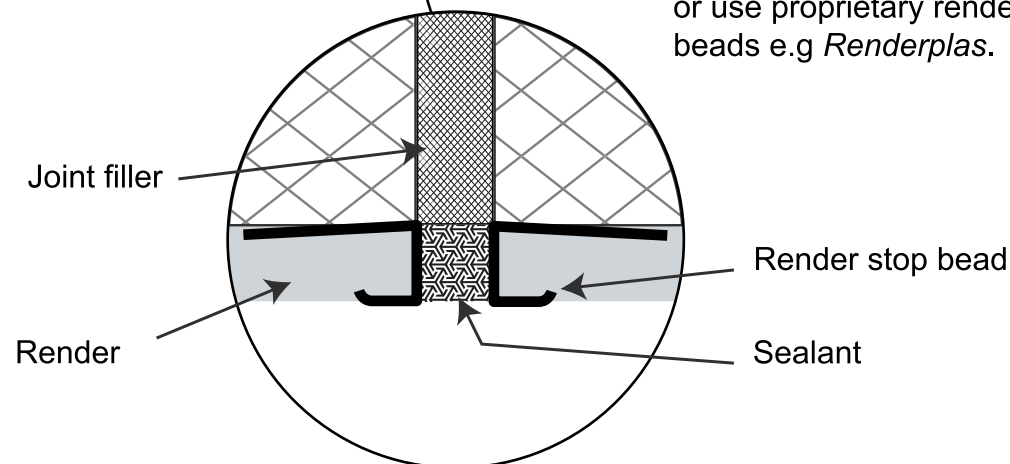

INSERT SCALE
1:1 actual size @ A4

Notes.

1. Movement joints are normally built to a 10 mm nominal width.
2. If required for structural continuity, metal de-bonded ties can be placed across the movement joint at 450mm vertical centres.

REV.	DATE.	DESCRIPTION.	BY.

These details have been produced for guidance only. It is the responsibility of the building designer to ensure that the details shown are compatible with the overall building design and will satisfy the relevant parts of the Building Regulations applicable before they are adopted into the project design.

LIGNACITE
Concrete Masonry Products

Lignacite Ltd Tel : +44 (0)1842 810678
Norfolk House, High St Fax : +44 (0)1842 814602
Brandon, Suffolk IP27 0AX. E-mail : info@lignacite.co.uk

Concrete Blockwork

Movement Joint to a Rendered Outer Leaf

DWG No. TDS/05

DRAWN BY PTS CHECKED BY C.M.

DATE June 2016 SCALE 1:5 @ A4 REV.NO.