

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Lignacrete Hollow 10.4N 140
Lignacite Ltd



EPD HUB, HUB-0142

Publishing date 07 October 2022, last updated on 30 August 2024, valid until 07 October 2027

GENERAL INFORMATION

MANUFACTURER

| | |
|-----------------|---|
| Manufacturer | Lignacite Ltd |
| Address | Norfolk House, High Street, Brandon, Suffolk, United Kingdom, IP270AX |
| Contact details | brandonsales@lignacite.co.uk |
| Website | www.lignacite.co.uk |

EPD STANDARDS, SCOPE AND VERIFICATION

| | |
|--------------------|--|
| Program operator | EPD Hub, hub@epdhub.com |
| Reference standard | EN 15804+A2:2019 and ISO 14025 |
| PCR | EPD Hub Core PCR version 1.0, 1 Feb 2022 |
| Sector | Construction product |
| Category of EPD | Third party verified EPD |
| Scope of the EPD | Cradle to gate with options, A4-B1, and modules C1-C4, D |
| EPD author | Adeleh Ghodsizadeh (Blue Marble Environmental Partnerships Ltd.) |
| EPD verification | Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification |
| EPD verifier | Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited |

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

PRODUCT

| | |
|-----------------------------------|--|
| Product name | Lignacrete Hollow 10.4N 140 |
| Additional labels | DH14010 - 440x140x215 |
| Product reference | DH1407 |
| Place of production | Brandon, Suffolk, United Kingdom, Nazeing, Essex, United Kingdom |
| Period for data | 2022 (Calendar Year) |
| Averaging in EPD | No averaging |
| Variation in GWP-fossil for A1-A3 | Not relevant % |

ENVIRONMENTAL DATA SUMMARY

| | |
|---|-----------------|
| Declared unit | 1m ² |
| Declared unit mass | 197 kg |
| GWP-fossil, A1-A3 (kgCO ₂ e) | 18.2 |
| GWP-total, A1-A3 (kgCO ₂ e) | 18.3 |
| Secondary material, inputs (%) | 0.02 |
| Secondary material, outputs (%) | 80 |
| Total energy use, A1-A3 (kWh) | 35.5 |
| Total water use, A1-A3 (m ³ e) | 0.73 |

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Formed in 1947, Lignacite has continued to develop innovative mixes and designs for their building blocks; more recently testing and successfully utilising many recycled materials to produce more sustainable products. We are committed to continuing an extensive R&D programme ensuring we stay at the cutting edge of the construction industry.

PRODUCT DESCRIPTION

Ligacrete is a high density, robust, loadbearing unit, suitable for internal and external walls. is a high strength block, available in standard, paintgrade and fairface finishes, suitable for use internally and externally above and below ground.

Lignacrete dense blocks are suitable for a wide range of applications. They have excellent levels of sound insulation and high strength capability, making them especially suitable for use in separating and partition walls. They can also be used as infill blocks in beam and block flooring systems. The blocks are medium grey to buff in colour with a texture, depending on grade suitable for plastering, rendering, directly painted or fair face. Fair Faced products are natural in colour and made to order.

Lignacrete can be considered for use in the following locations:

- The inner and outer leaves of external cavity walls,
- Internal walls including fire break walls
- Separating walls including those conforming to Robust Detail specifications
- High strength, loadbearing walls
- External and internal walls below ground
- Infill units to beam and block flooring
- Hollow blocks to construct reinforced retaining walls

This product has a mean unit strength of 10.4N/mm².

Further information can be found at www.lignacite.co.uk.

PRODUCT RAW MATERIAL MAIN COMPOSITION

| Raw material category | Amount, mass- % | Material origin |
|-----------------------|-----------------|-----------------|
| Metals | | |
| Minerals | 100 | UK |
| Fossil materials | | |
| Bio-based materials | 0 | UK |

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

| | |
|--|---|
| Biogenic carbon content in product, kg C | 0 |
| Biogenic carbon content in packaging, kg C | 0 |

FUNCTIONAL UNIT AND SERVICE LIFE

| | |
|------------------------|--|
| Declared unit | 1m ² |
| Mass per declared unit | 197 kg |
| Functional unit | 1m ² of concrete block with a service life of 100 years |
| Reference service life | 100 years |

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

| Product stage | | | Assembly stage | | Use stage | | | | | | | End of life stage | | | | Beyond the system boundaries | | |
|---------------|-----------|---------------|----------------|----------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-------------------|-----------|------------------|----------|------------------------------|----------|-----------|
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D | | |
| x | x | x | x | x | x | MND | MND | MND | MND | MND | MND | x | x | x | x | x | | |
| Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | Deconstr./demol. | Transport | Waste processing | Disposal | Reuse | Recovery | Recycling |

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Concrete block production starts by transporting the binders, aggregates and additives to silos, from where they are dosed onto a conveyor and into a mixer. Cement is then added to the ingredients, after which the material is mixed dry. Water is then added to the mixture, followed by wet mixing. The wet mass is filled into molds and vibrated to its final shape. The blocks are then transported on an automatic line to a dryer. From the dryer, the

ingots go to the packaging line, where they are banded and taken for storage.

The study also considers the material losses occurring during the manufacturing processes. The average distance of 50 kilometres is considered for transferring waste to the waste processing centre. Energy is provided from both renewable energy sources and the UK grid. Plastic strapping is used for packaging the product.

TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The transportation distance is defined according to the PCR. Average distance of transportation from production plant to building site is assumed as 89.7 km and the transportation method is assumed to be lorry. Vehicle capacity utilization is assumed to be 100 % which means full load. In reality, it may vary but as role of transportation emissions in total results is small, the variety in load is assumed to be negligible. Empty returns are not taken into account as it is assumed that return trip is used by the transportation company to serve the needs of other clients. Transportation does not cause losses as product are packaged properly. Also, volume capacity utilisation factor is assumed to be 100 % for the nested packaged products.

44.2% of packaging material is recycled and the rest will be sent to landfill (gov.uk). All the packaging waste will be transferred 50 kilometres to the waste processing centre.

Installation of the product is a manual process and no energy is consumed at this stage.

PRODUCT USE AND MAINTENANCE (B1-B7)

The carbonation value has been calculated as per methodology outlined in EN 16757:2022.


The reference service life of the product is assumed to be 100 years.

Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

At the end-of-life, in the demolition phase 100% of the waste is assumed to be collected as separate construction waste. The demolition process consumes energy in the form of diesel fuel used by building machines. Energy consumption of a demolition process is on the average 10 kWh/m² (Bozdağ, Ö & Seçer, M. 2007). Basing on a Level(s) project, an average mass of a reinforced concrete building is about 1000 kg/m². Therefore, energy consumption demolition is assumed to be 10 kWh/1000 kg = 0,01 kWh/kg. It is assumed the mass of the waste blocks per m² will be the same as the declared value. The source of energy is diesel fuel used by work machines (C1). The dismantled concrete blocks are delivered to the nearest construction waste treatment plant. It is estimated that there is no mass loss during the use of the product, therefore the end-of-life product is assumed that it has the same weight with the declared product. Transportation distance to the closest disposal area is estimated as 50 km and the transportation method is lorry which is the most common. At the waste treatment plant, waste that can be reused, recycled or recovered for energy is separated and diverted for further use. It can be assumed that 100% of the concrete blocks are transported to a waste treatment plant, where the blocks are crushed and separated. About 80% of concrete (Betoniteollisuus ry, 2020) assumed to be recycled based on a conservative scenario (gov.uk). The process losses of the waste treatment plant are assumed to be negligible (C3). The remaining 20% of concrete is to be sent to the landfill (C4). Due to the recycling potential of concrete, they can be crushed and used as secondary raw material, which avoids the use of virgin raw materials. The 80 % of concrete going to waste processing is converted into secondary raw materials after recycling. The recycled material content in the concrete itself is assumed to be 0 % (D).

MANUFACTURING PROCESS

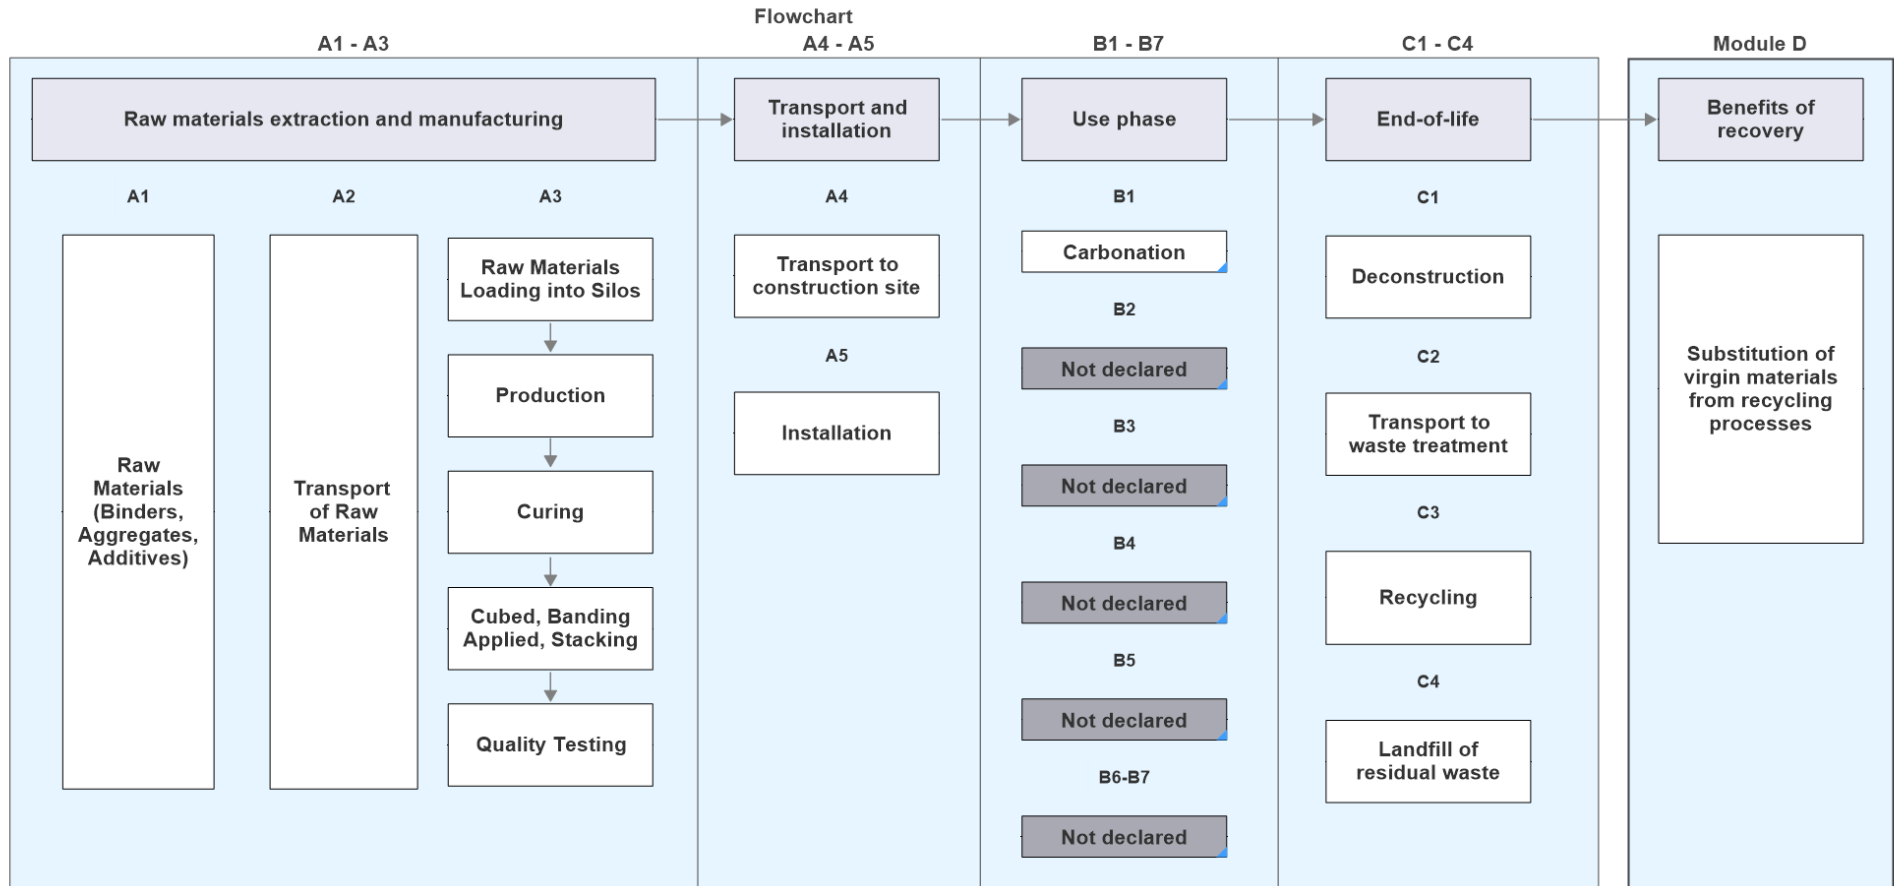

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

| Data type | Allocation |
|--------------------------------|---------------|
| Raw materials | No allocation |
| Packaging materials | No allocation |
| Ancillary materials | No allocation |
| Manufacturing energy and waste | No allocation |

AVERAGES AND VARIABILITY

| | |
|-----------------------------------|----------------|
| Type of average | No averaging |
| Averaging method | Not applicable |
| Variation in GWP-fossil for A1-A3 | Not relevant |

There is no average result considered in this study since this EPD refers to one specific product produced in one production plant.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. The EPD Generator uses Ecoinvent v3.8, Plastics Europe, Federal LCA Commons and One Click LCA databases as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-------------------------------------|------------------------|----------|----------|----------|----------|----------|----------|-----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| GWP – total ¹⁾ | kg CO ₂ e | 1.66E+01 | 8.07E-01 | 8.39E-01 | 1.83E+01 | 1.60E+00 | 2.43E-02 | -1.01E+00 | MND | MND | MND | MND | MND | MND | 6.52E-01 | 9.25E-01 | 6.33E-01 | 2.08E-01 | -1.28E+00 |
| GWP – fossil | kg CO ₂ e | 1.66E+01 | 8.07E-01 | 8.39E-01 | 1.82E+01 | 1.60E+00 | 2.43E-02 | -1.01E+00 | MND | MND | MND | MND | MND | MND | 6.52E-01 | 9.24E-01 | 6.33E-01 | 2.07E-01 | -1.28E+00 |
| GWP – biogenic | kg CO ₂ e | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| GWP – LULUC | kg CO ₂ e | 5.45E-02 | 2.90E-04 | 5.28E-04 | 5.53E-02 | 5.76E-04 | 1.24E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 6.49E-05 | 3.41E-04 | 6.30E-05 | 1.96E-04 | -1.73E-03 |
| Ozone depletion pot. | kg CFC ₁₁ e | 6.36E-07 | 1.93E-07 | 1.24E-07 | 9.52E-07 | 3.83E-07 | 1.19E-10 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.39E-07 | 2.13E-07 | 1.35E-07 | 8.39E-08 | -1.09E-07 |
| Acidification potential | mol H ⁺ e | 5.83E-02 | 3.37E-03 | 5.37E-03 | 6.70E-02 | 6.69E-03 | 7.45E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 6.77E-03 | 3.91E-03 | 6.58E-03 | 1.95E-03 | -8.23E-03 |
| EP-freshwater ²⁾ | kg Pe | 2.82E-04 | 5.52E-06 | 1.06E-05 | 2.98E-04 | 1.10E-05 | 2.68E-08 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 2.16E-06 | 7.57E-06 | 2.10E-06 | 2.17E-06 | -7.22E-05 |
| EP-marine | kg Ne | 1.43E-02 | 1.02E-03 | 2.07E-03 | 1.74E-02 | 2.03E-03 | 2.91E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.00E-03 | 1.16E-03 | 2.91E-03 | 6.75E-04 | -1.78E-03 |
| EP-terrestrial | mol Ne | 1.63E-01 | 1.12E-02 | 2.28E-02 | 1.98E-01 | 2.23E-02 | 3.01E-05 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.29E-02 | 1.28E-02 | 3.19E-02 | 7.43E-03 | -2.32E-02 |
| POCP (“smog”) ³⁾ | kg NMVOCe | 4.31E-02 | 3.62E-03 | 6.29E-03 | 5.30E-02 | 7.19E-03 | 9.09E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 9.04E-03 | 4.11E-03 | 8.78E-03 | 2.16E-03 | -5.98E-03 |
| ADP-minerals & metals ⁴⁾ | kg Sbe | 5.67E-05 | 1.89E-06 | 2.37E-06 | 6.10E-05 | 3.76E-06 | 1.15E-08 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.30E-07 | 2.17E-06 | 3.22E-07 | 4.77E-07 | -1.23E-05 |
| ADP-fossil resources | MJ | 9.08E+01 | 1.23E+01 | 1.46E+01 | 1.18E+02 | 2.45E+01 | 1.15E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 8.77E+00 | 1.39E+01 | 8.52E+00 | 5.69E+00 | -1.83E+01 |
| Water use ⁵⁾ | m ³ e depr. | 3.43E+00 | 5.70E-02 | 1.65E-01 | 3.66E+00 | 1.13E-01 | 8.51E-04 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 2.36E-02 | 6.21E-02 | 2.29E-02 | 1.80E-02 | -2.43E+00 |

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|----------------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Particulate matter | Incidence | 6.89E-07 | 9.49E-08 | 1.30E-07 | 9.14E-07 | 1.89E-07 | 1.73E-10 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.82E-07 | 1.07E-07 | 1.35E-06 | 3.93E-08 | -1.06E-07 |
| Ionizing radiation ⁶⁾ | kBq U235e | 7.87E-01 | 6.36E-02 | 3.20E-01 | 1.17E+00 | 1.26E-01 | 8.04E-05 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 4.03E-02 | 6.61E-02 | 3.91E-02 | 2.57E-02 | -2.73E-01 |
| Ecotoxicity (freshwater) | CTUe | 1.78E+02 | 1.03E+01 | 8.89E+00 | 1.97E+02 | 2.04E+01 | 3.76E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 5.27E+00 | 1.25E+01 | 5.12E+00 | 3.71E+00 | -2.30E+01 |
| Human toxicity, cancer | CTUh | 3.98E-09 | 2.71E-10 | 2.72E-10 | 4.52E-09 | 5.38E-10 | 5.80E-12 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 2.02E-10 | 3.07E-10 | 1.96E-10 | 9.28E-11 | -1.27E-09 |
| Human tox. non-cancer | CTUh | 1.40E-07 | 1.09E-08 | 6.48E-09 | 1.57E-07 | 2.16E-08 | 6.28E-11 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.81E-09 | 1.24E-08 | 3.70E-09 | 2.43E-09 | -2.35E-08 |
| SQP ⁷⁾ | - | 2.04E+02 | 1.44E+01 | 4.25E+00 | 2.23E+02 | 2.86E+01 | 1.66E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.14E+00 | 1.60E+01 | 1.11E+00 | 1.22E+01 | -1.76E+01 |

6) EN 15804+A2 disclaimer for ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|------------------------------------|----------------|----------|----------|----------|----------|----------|----------|----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Renew. PER as energy ⁸⁾ | MJ | 7.07E+00 | 1.60E-01 | 2.09E+00 | 9.32E+00 | 3.18E-01 | 7.09E-04 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 5.01E-02 | 1.56E-01 | 4.87E-02 | 4.94E-02 | -1.65E+00 |
| Renew. PER as material | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Total use of renew. PER | MJ | 7.07E+00 | 1.60E-01 | 2.09E+00 | 9.32E+00 | 3.18E-01 | 7.09E-04 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 5.01E-02 | 1.56E-01 | 4.87E-02 | 4.94E-02 | -1.65E+00 |
| Non-re. PER as energy | MJ | 9.08E+01 | 1.23E+01 | 1.52E+01 | 1.18E+02 | 2.45E+01 | 1.15E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 8.77E+00 | 1.39E+01 | 8.52E+00 | 5.69E+00 | -1.85E+01 |
| Non-re. PER as material | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Total use of non-re. PER | MJ | 9.08E+01 | 1.23E+01 | 1.52E+01 | 1.18E+02 | 2.45E+01 | 1.15E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 8.77E+00 | 1.39E+01 | 8.52E+00 | 5.69E+00 | -1.85E+01 |
| Secondary materials | kg | 3.11E-02 | 3.48E-03 | 3.55E-03 | 3.81E-02 | 6.92E-03 | 3.81E-05 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.43E-03 | 3.85E-03 | 3.33E-03 | 1.20E-03 | -9.30E-03 |
| Renew. secondary fuels | MJ | 1.67E-03 | 3.07E-05 | 6.45E-04 | 2.35E-03 | 6.10E-05 | 3.12E-07 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.12E-05 | 3.89E-05 | 1.09E-05 | 3.12E-05 | -1.44E-04 |
| Non-ren. secondary fuels | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Use of net fresh water | m ³ | 9.01E-02 | 1.64E-03 | 6.34E-01 | 7.26E-01 | 3.26E-03 | 8.76E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 5.33E-04 | 1.80E-03 | 5.17E-04 | 6.23E-03 | -3.39E-01 |

8) PER = Primary energy resources.

END OF LIFE – WASTE

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|---------------------|------|----------|----------|----------|----------|----------|----------|----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Hazardous waste | kg | 4.04E-01 | 1.32E-02 | 2.89E-02 | 4.47E-01 | 2.63E-02 | 2.66E-04 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.17E-02 | 1.84E-02 | 1.14E-02 | 0.00E+00 | -1.07E-01 |
| Non-hazardous waste | kg | 1.12E+01 | 2.30E-01 | 3.64E-01 | 1.18E+01 | 4.58E-01 | 1.24E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 8.25E-02 | 3.02E-01 | 8.01E-02 | 3.94E+01 | -3.15E+00 |
| Radioactive waste | kg | 4.49E-04 | 8.51E-05 | 1.11E-04 | 6.46E-04 | 1.69E-04 | 5.59E-08 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 6.18E-05 | 9.29E-05 | 6.00E-05 | 0.00E+00 | -9.13E-05 |

END OF LIFE – OUTPUT FLOWS

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|--------------------------|------|----------|----------|----------|----------|----------|----------|----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|----------|
| Components for re-use | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for recycling | kg | 0.00E+00 | 0.00E+00 | 1.82E+00 | 1.82E+00 | 0.00E+00 | 1.02E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 1.58E+02 | 0.00E+00 | 0.00E+00 |
| Materials for energy rec | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy | MJ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|----------------------|------------------------------------|----------|----------|----------|----------|----------|----------|-----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| Global Warming Pot. | kg CO ₂ e | 1.65E+01 | 7.99E-01 | 8.28E-01 | 1.81E+01 | 1.59E+00 | 2.41E-02 | -1.01E+00 | MND | MND | MND | MND | MND | MND | 6.45E-01 | 9.15E-01 | 6.26E-01 | 2.03E-01 | -1.25E+00 |
| Ozone depletion Pot. | kg CFC ₁₁ e | 5.10E-07 | 1.53E-07 | 9.11E-08 | 7.54E-07 | 3.03E-07 | 9.79E-11 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.10E-07 | 1.68E-07 | 1.07E-07 | 6.64E-08 | -8.58E-08 |
| Acidification | kg SO ₂ e | 4.61E-02 | 2.61E-03 | 3.96E-03 | 5.26E-02 | 5.19E-03 | 5.52E-06 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 4.83E-03 | 3.04E-03 | 4.69E-03 | 1.47E-03 | -6.38E-03 |
| Eutrophication | kg PO ₄ ³ e | 1.31E-02 | 5.83E-04 | 1.04E-03 | 1.47E-02 | 1.16E-03 | 7.18E-05 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.12E-03 | 6.93E-04 | 1.09E-03 | 3.18E-04 | -2.99E-03 |
| POCP ("smog") | kg C ₂ H ₄ e | 1.94E-03 | 1.03E-04 | 1.33E-04 | 2.17E-03 | 2.04E-04 | 8.29E-07 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 1.06E-04 | 1.19E-04 | 1.03E-04 | 6.18E-05 | -4.35E-04 |
| ADP-elements | kg Sbe | 3.09E-05 | 1.84E-06 | 2.37E-06 | 3.51E-05 | 3.66E-06 | 1.13E-08 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 3.25E-07 | 2.10E-06 | 3.16E-07 | 4.70E-07 | -1.22E-05 |
| ADP-fossil | MJ | 9.08E+01 | 1.23E+01 | 1.63E+01 | 1.19E+02 | 2.45E+01 | 1.15E-02 | 0.00E+00 | MND | MND | MND | MND | MND | MND | 8.77E+00 | 1.39E+01 | 8.52E+00 | 5.69E+00 | -1.90E+01 |

ENVIRONMENTAL IMPACTS – GWP-GHG - THE INTERNATIONAL EPD SYSTEM

| Impact category | Unit | A1 | A2 | A3 | A1-A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
|-----------------------|----------------------|----------|----------|----------|----------|----------|----------|-----------|-----|-----|-----|-----|-----|-----|----------|----------|----------|----------|-----------|
| GWP-GHG ⁹⁾ | kg CO ₂ e | 1.66E+01 | 8.07E-01 | 8.39E-01 | 1.82E+01 | 1.60E+00 | 2.43E-02 | -1.01E+00 | MND | MND | MND | MND | MND | MND | 6.52E-01 | 9.24E-01 | 6.33E-01 | 2.07E-01 | -1.28E+00 |

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 1.2.5 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online](#)

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

Updated 30.08.2024

